

Trio Etex[®]

Stretch Film

Trio-Etex is a high performance cast stretch film with perfect optics and puncture resistance. This film is approved to use in food contact and is therefore very well suited for the food industry. This film is developed to endure high pre-stretch levels leading to greater economy.


Why choose this product?

- + High performance stretch film
- + Less film consumption per wrapped pallet
- + High puncture resistance and holding force
- + Approved for food contact

Technical specification

Item no	Thickness	Pre stretch	Width	Length	Colour	Cling	Reels/ pallet	Reels gross weight
9259	12 µm	220 %	500 mm	3000 m	Transp.	Inside	30	17,3 kg
9260	15 µm	270 %	500 mm	2400 m	Transp.	Inside	30	17,3 kg
9261	17 µm	300 %	500 mm	2100 m	Transp.	Inside	30	17,2 kg
9262	20 µm	330 %	500 mm	1800 m	Transp.	Inside	30	17,3 kg
9265	23 µm	350 %	500 mm	1550 m	Transp.	Inside	30	17,2 kg

Data is only intended for information and could be changed without previous notice. Every endeavour has been made to ensure that the information given herein is true and reliable but is given only for guidance. The tests are performed at 23 °C temperature (+/- 2 degrees). The roll gross weight has a tolerance of +/- 4 %

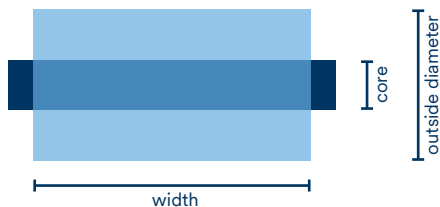

Your performance

Trio Etex is the natural choice to use for high performance stretch wrapping machines. The key with any stretch film is to use the minimum amount of film to wrap the pallet whilst producing a stable load. Trio Etex gives you a perfect load containment with a minimum of stretch film. Pallets will not stick together due to excellent slip properties.

